

TECH DATA

Everlastic® Rubber "J" (Gate Seals)

Material Specification:

- Hi Tensile Neoprene Williams Compound # 1025, also available in other rubber compounds.

revised 6-20-03

revised 10-06-05

Tolerance:

- Width $\pm 3/16$ "
- Diameter of Bulb $\pm 1/16$ "
- Length at 30' $\pm 2'-0$ "

Available Sizes:

- 1-3/4" Dia Solid Bulb or Hollow Bulb 4" Wide.
- For custom configurations contact **Williams Products**.


Uses:

- Low head gate where conditions are favorable to using the water pressure to aid in sealing.
- Flat, vertical lift gates, bulkheads, stop locks.

TYPICAL PHYSICAL PROPERTIES

PROPERTY	TYPICAL VALUES
Tensile Strength	2250 min. PSI
Ultimate Elongation	400 % min.
Shore A Durometer	60 / 70
Specific Gravity	1.4
Compression Set	30% max
Tensile Strength after Oxygen Bomb Aging	80% min.
Ozone Resistance	Good

All "J" Seals, set forth in these specifications and / shown on the drawings, shall be of an extruded **NEOPRENE RUBBER**, with a **SOLID** or **HOLLOW BULB**, and typically **4" wide**, as manufactured by **WILLIAMS PRODUCTS, INC.** For custom profiles and other rubber compounds of "J" Seals, contact WILLIAMS PRODUCTS, INC.

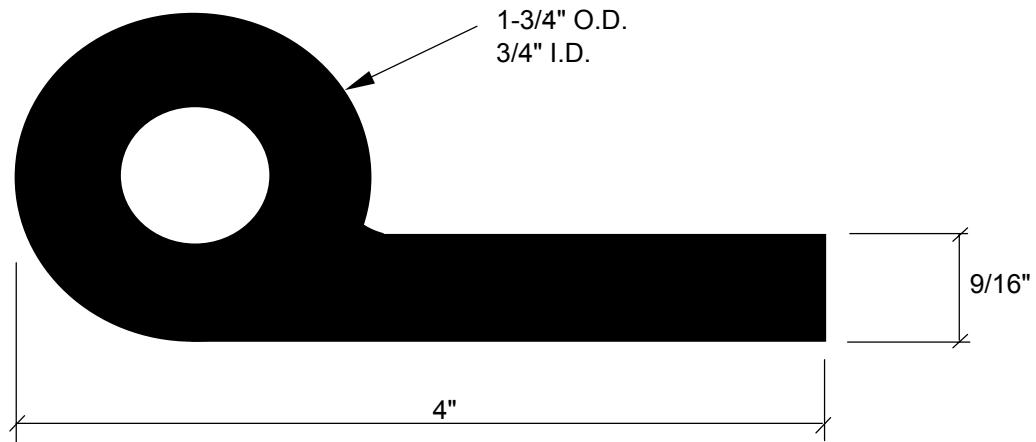

STANDARD RUBBER "J" (GATE SEAL)



To the best of our knowledge this published information is accurate, however, to determine suitability of material/product for a specific application is the user's responsibility. Williams Products, Inc. shall not be liable for any loss or damage resulting from inappropriate usage.

WILLIAMS PRODUCTS, INC.

1750 MAPLELAWN BOULEVARD - TROY MICHIGAN 48084 - PHONE (248) 643-6400 - TOLL FREE (800) 521-9594 - FAX (248) 643-7117

www.williamsproducts.net